


Features

- Enhancement mode
- Fast Switching and High efficiency
- 100% Avalanche test

V_{DS}	-30	V
$R_{DS(on),TYP} @ V_{GS}=-10\text{ V}$	10	$\text{m}\Omega$
$R_{DS(on),TYP} @ V_{GS}=-4.5\text{ V}$	18	$\text{m}\Omega$
I_D	-37	A

PDFN3333

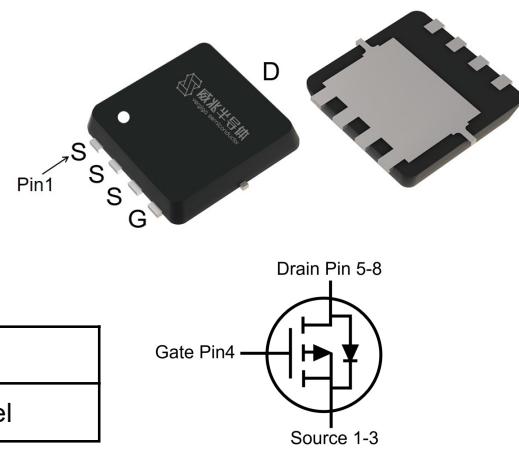

Part ID	Package Type	Marking	Packing
VS3510AE	PDFN3333	3510AE	5000pcs/Reel

Maximum ratings, at $T_A = 25^\circ\text{C}$, unless otherwise specified

Symbol	Parameter	Rating	Unit
$V(BR)DSS$	Drain-Source breakdown voltage	-30	V
V_{GS}	Gate-Source voltage	± 25	V
I_S	Diode continuous forward current	$T_C = 25^\circ\text{C}$	A
I_D	Continuous drain current @ $V_{GS}=-10\text{V}$	$T_C = 25^\circ\text{C}$	A
		$T_C = 100^\circ\text{C}$	A
I_{DM}	Pulse drain current tested ①	$T_C = 25^\circ\text{C}$	A
EAS	Avalanche energy, single pulsed ②	49	mJ
P_D	Maximum power dissipation	$T_C = 25^\circ\text{C}$	W
$T_{STG,TJ}$	Storage and Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typical	Unit
R_{eJC}	Thermal Resistance, Junction-to-Case	3.8	$^\circ\text{C/W}$
R_{eJA}	Thermal Resistance, Junction-to-Ambient	35	$^\circ\text{C/W}$

Electrical Characteristics

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (unless otherwise stated)						
V(BR)DSS	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}, I_D=-250\mu\text{A}$	-30	--	--	V
IDSS	Zero Gate Voltage Drain Current	$V_{DS}=-30\text{V}, V_{GS}=0\text{V}$	--	--	-1	μA
	Zero Gate Voltage Drain Current($T_j=125^\circ\text{C}$)	$V_{DS}=-30\text{V}, V_{GS}=0\text{V}$	--	--	-100	μA
IGSS	Gate-Body Leakage Current	$V_{GS}=\pm 25\text{V}, V_{DS}=0\text{V}$	--	--	± 100	nA
VGS(th)	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu\text{A}$	-1.3	-1.9	-2.4	V
RDS(on)	Drain-Source On-State Resistance ③	$V_{GS}=-10\text{V}, I_D=-20\text{A}$	--	10	13	$\text{m}\Omega$
RDS(on)	Drain-Source On-State Resistance ③	$V_{GS}=-4.5\text{V}, I_D=-16\text{A}$	--	18	23	$\text{m}\Omega$
Dynamic Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (unless otherwise stated)						
Ciss	Input Capacitance	$V_{DS}=-15\text{V}, V_{GS}=0\text{V}, f=1\text{MHz}$	--	2565	--	pF
Coss	Output Capacitance		--	300	--	pF
Crss	Reverse Transfer Capacitance		--	220	--	pF
Rg	Gate Resistance	f=1MHz	--	2.9	--	Ω
Qg	Total Gate Charge	$V_{DS}=-15\text{V}, I_D=-20\text{A}, V_{GS}=-10\text{V}$	--	44	--	nC
Qgs	Gate-Source Charge		--	9	--	nC
Qgd	Gate-Drain Charge		--	10.6	--	nC
Switching Characteristics						
Td(on)	Turn-on Delay Time	$V_{DD}=-15\text{V}, I_D=-20\text{A}, R_G=3\Omega, V_{GS}=-10\text{V}$	--	11.4	--	ns
Tr	Turn-on Rise Time		--	22	--	ns
Td(off)	Turn-Off Delay Time		--	57	--	ns
Tf	Turn-Off Fall Time		--	32	--	ns
Source- Drain Diode Characteristics@ $T_j = 25^\circ\text{C}$ (unless otherwise stated)						
VSD	Forward on voltage	$I_{SD}=-20\text{A}, V_{GS}=0\text{V}$	--	-0.9	-1.2	V
Trr	Reverse Recovery Time	$I_{SD}=-20\text{A}, V_{GS}=0\text{V}$ $dI/dt=-500\text{A}/\mu\text{s}$	--	27	--	ns
Qrr	Reverse Recovery Charge		--	77	--	nC

NOTE:

- ① Repetitive rating; pulse width limited by max junction temperature.
- ② Limited by T_{Jmax} , starting $T_J = 25^\circ\text{C}$, $L = 0.5\text{mH}$, $R_G = 25\Omega$, $I_{AS} = -14\text{A}$, $V_{GS} = -10\text{V}$. Part not recommended for use above this value
- ③ Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$.

Typical Characteristics

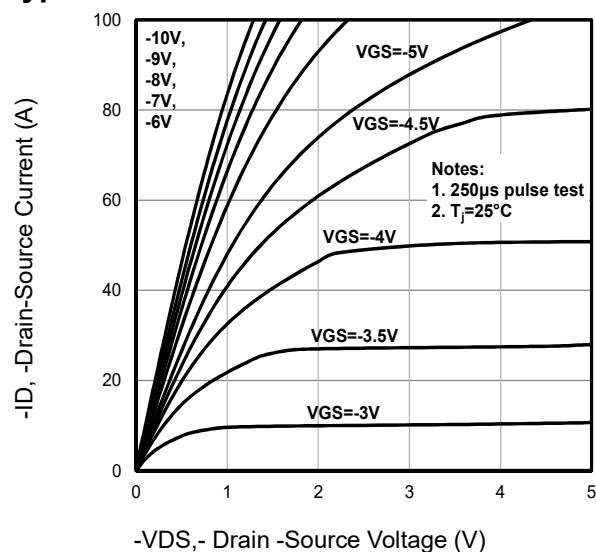


Fig1. Typical Output Characteristics

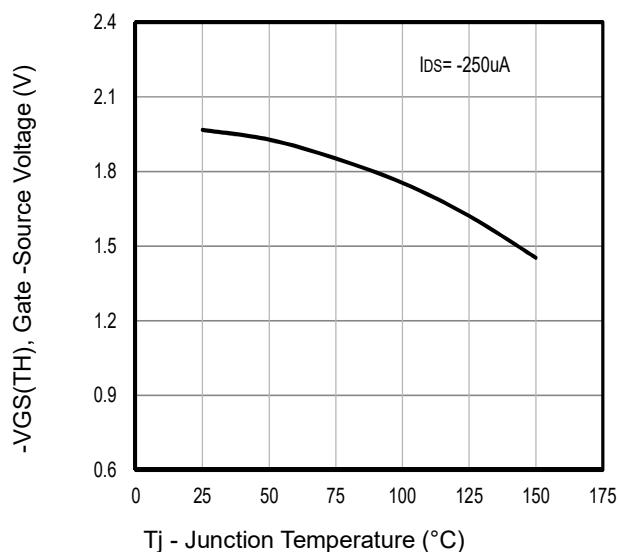


Fig2. $-V_{GS(TH)}$ Gate -Source Voltage Vs. T_j

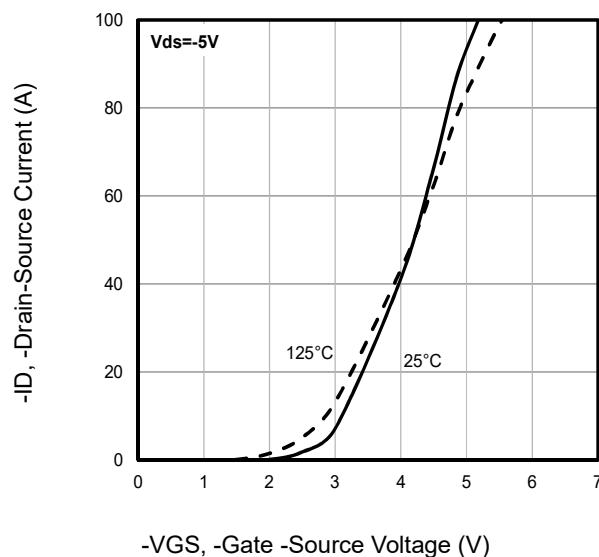


Fig3. Typical Transfer Characteristics

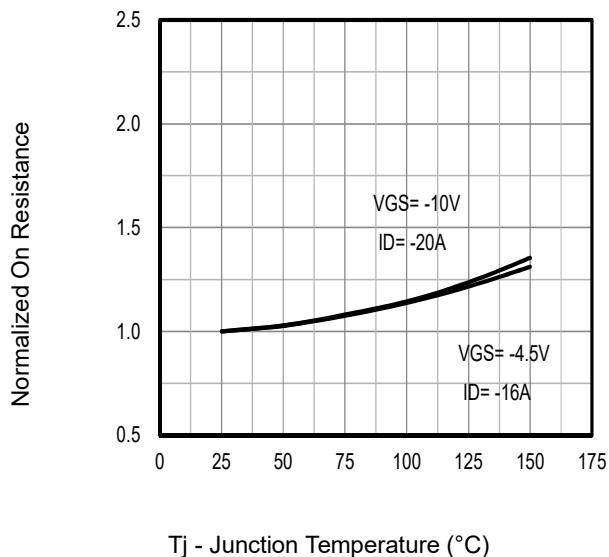


Fig4. Normalized On-Resistance Vs. T_j

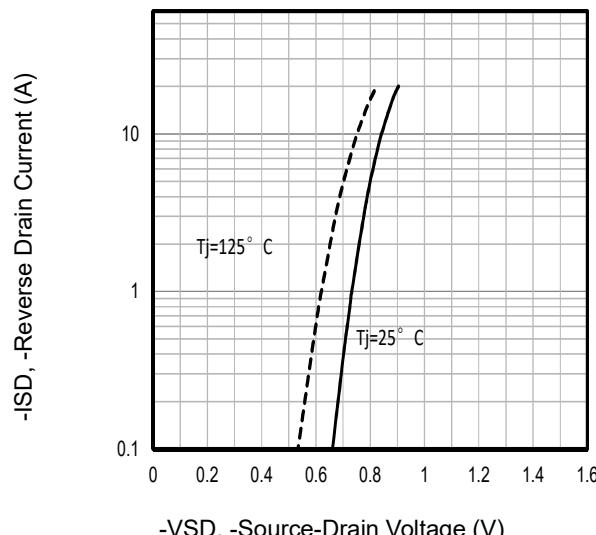


Fig5. Typical Source-Drain Diode Forward Voltage

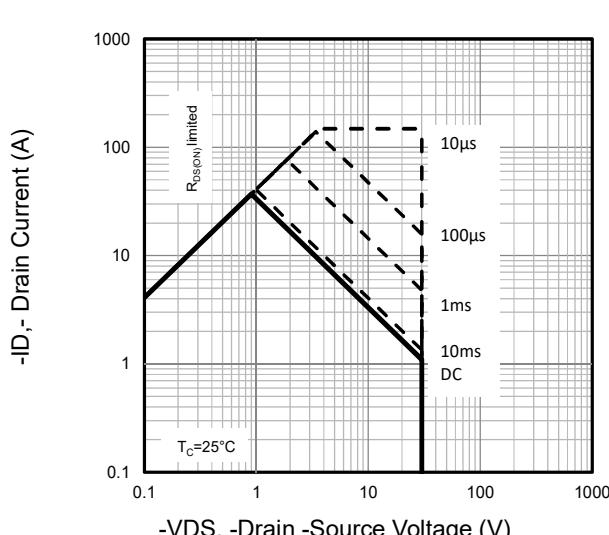


Fig6. Maximum Safe Operating Area

Typical Characteristics

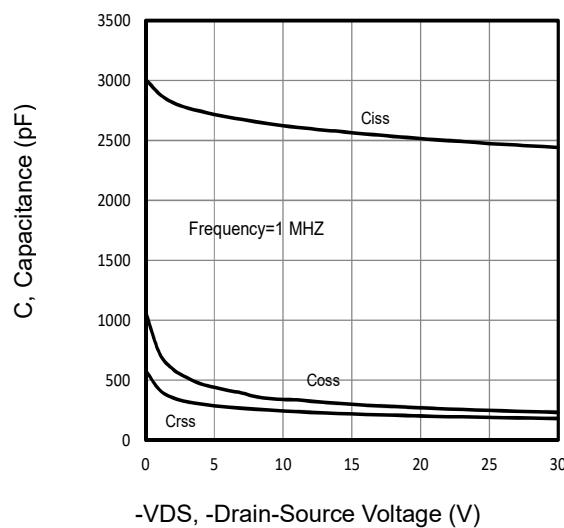


Fig7. Typical Capacitance Vs. Drain-Source Voltage

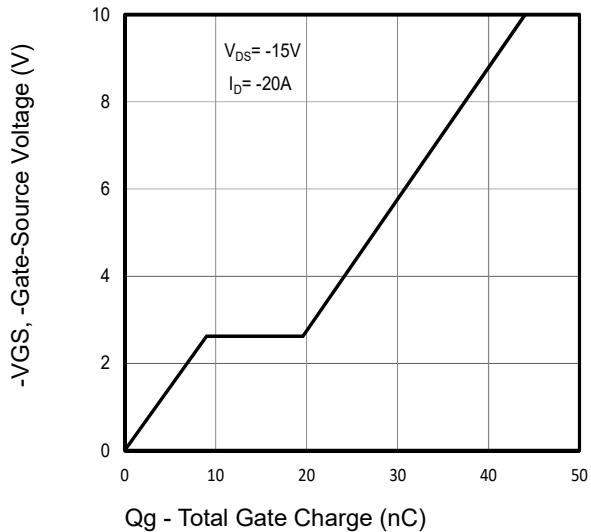


Fig8. Typical Gate Charge Vs. Gate-Source Voltage

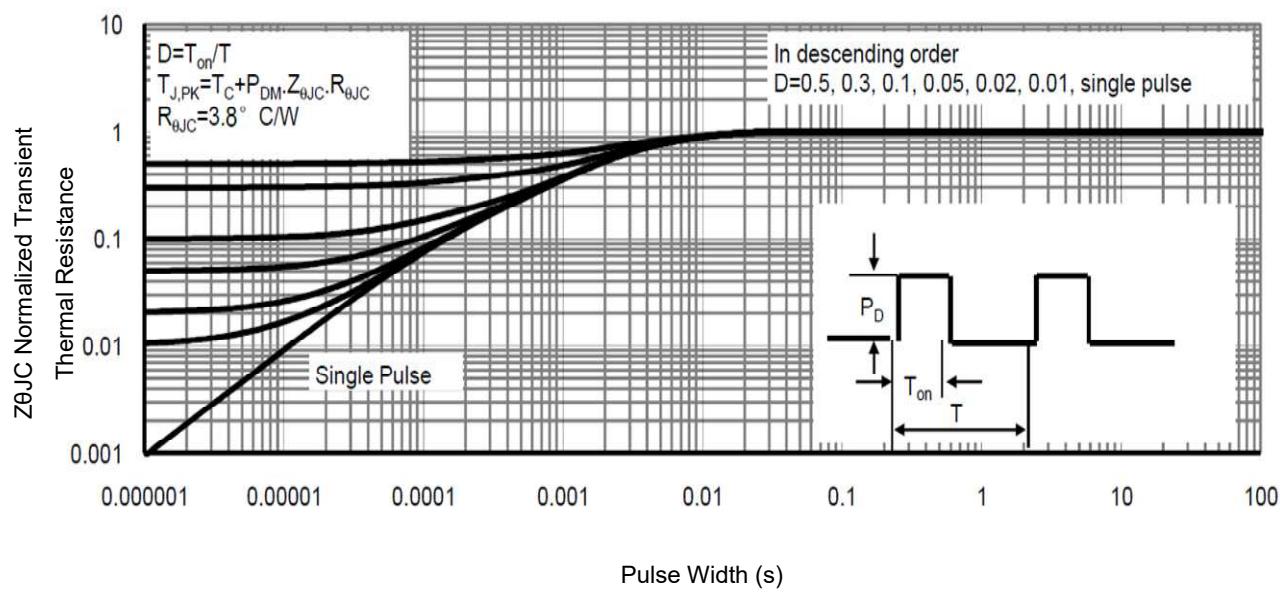


Fig9. Normalized Maximum Transient Thermal Impedance

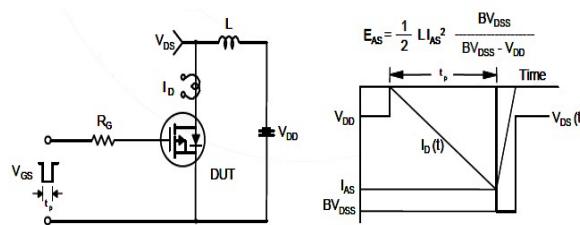


Fig10. Unclamped Inductive Test Circuit and Waveforms

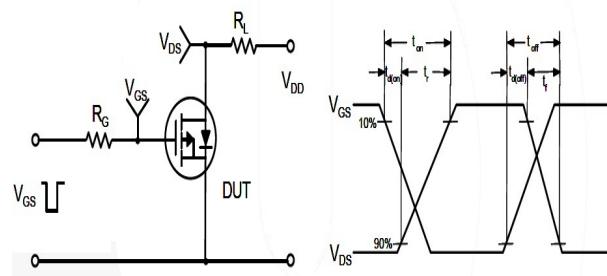
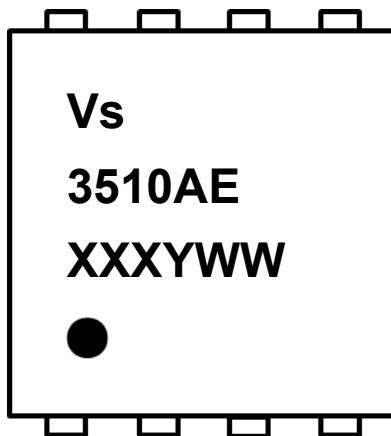


Fig11. Switching Time Test Circuit and waveforms

Marking Information

1st line: Vergiga Code (Vs)

2nd line: Part Number (3510AE)

3rd line: Date code (XXXYWW)


XXX: Wafer Lot Number Code, code changed with Lot Number

Y: Year Code , refer to table below

WW: Week Code (01 to 53)

Code	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
Year	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030

PDFN3333 Package Outline Data

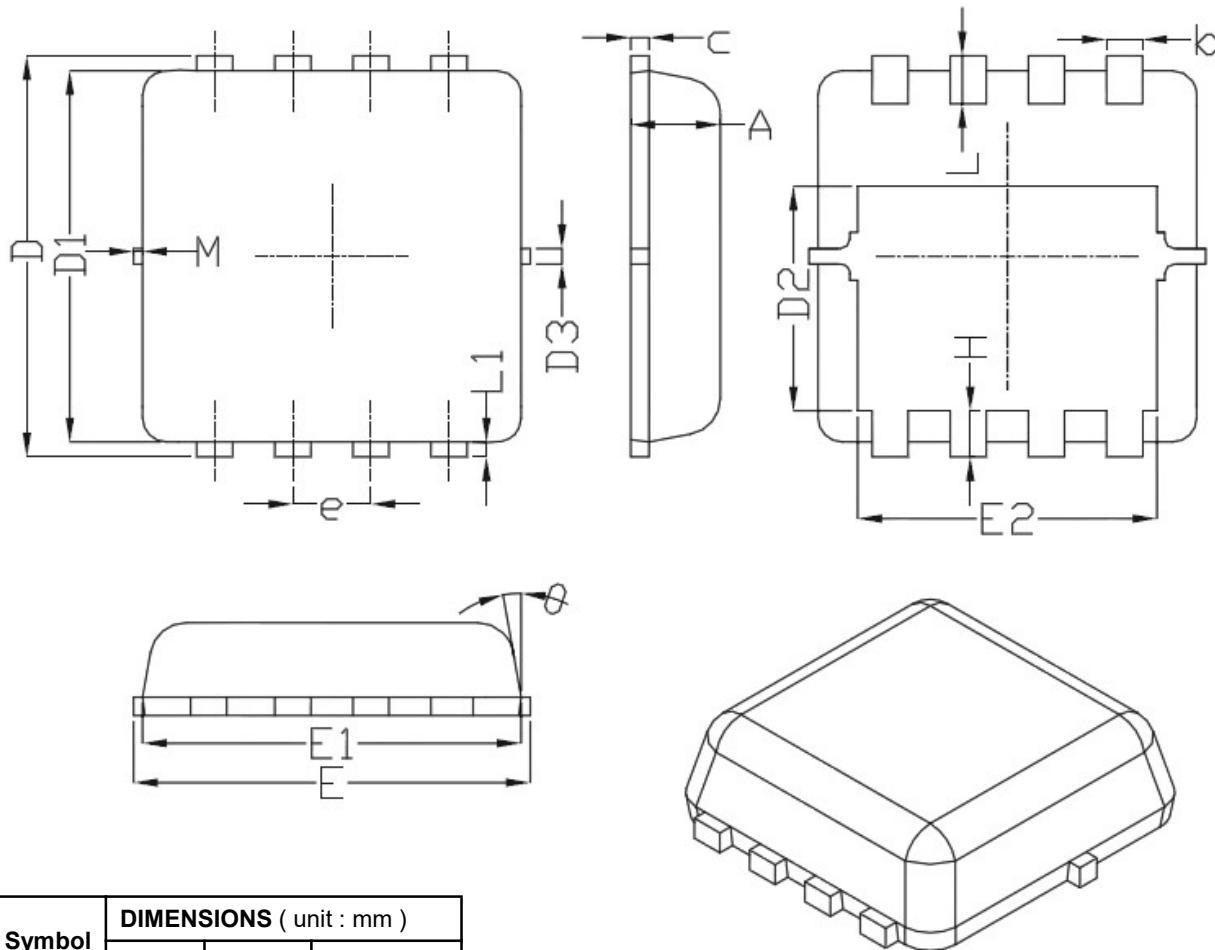

Symbol	DIMENSIONS (unit : mm)		
	Min	Typ	Max
A	0.7	0.75	0.8
b	0.25	0.3	0.35
C	0.1	0.15	0.25
D	3.25	3.35	3.45
D1	3	3.1	3.2
D2	1.78	1.88	1.98
D3	--	0.13	--
E	3.2	3.3	3.4
E1	3	3.15	3.2
E2	2.39	2.49	2.59
e	0.65 BSC		
H	0.3	0.39	0.5
L	0.3	0.4	0.5
L1	--	0.13	--
θ	--	10°	12°
M	*	*	0.15
* Not specified			

Notes:

1. Follow JEDEC MO-240 variation CA.
2. Dimensions "D1" and "E1" do NOT include mold flash protrusions or gate burrs.
3. Dimensions "D1" and "E1" include interterminal flash or protrusion. Interterminal flash or protrusion shall not exceed 0.25mm per side.

Customer Service

Sales and Service:

sales@vgsemi.com

Vergiga Semiconductor CO., LTD

TEL: (86-755) -26902410

FAX: (86-755) -26907027

WEB: www.vgsemi.com